PIHER



MECHANICAL SPECIFICATIONS

 Mechanical rotation angle: 240° ± 5° available under drawing (blue 	265° ± 5° housing only)
- Electrical rotation angle:	240° ± 20°
– Torque:	0.5 to 2.5 Ncm. (0.7 to 3.4 in-oz)
– Stop torque:	> 10 Ncm. (>14 in-oz)

up to 200K cycles

– Life:



FEATURES


- Carbon resistive element.
- IP54 protection according to IEC 60529.
- Polyester substrate.
- Also upon request:
 - -- Long life model for low cost control pot. applications
 - Low torque option
 - -- Supplied in magazines for automatic insertion.
 - Wiper positioned at 50% or fully clockwise.
 - -- Self extinguishable plastic UL 94V-0.
 - Cut track option.
 - Special Tapers.
 - Mechanical detents.

ELECTRICAL SPECIFICATIONS

- Range of values (*) $100\Omega \leq Rn \leq 5 \ M \ (\text{Decad. } 1.0 \ \text{--} \ 2.0 \ \text{--} \ 2.2 \ \text{--} \ 2.5 \ \text{--} \ 4.7 \ \text{--} \ 5.0)$
- $\begin{array}{ll} \mbox{ Tolerance (*): } 100\Omega \leq \mbox{ Rn} \leq 1M \ \Omega & \mbox{ \pm 20\% } \\ 1M\Omega & < \mbox{ Rn} \leq 5M & \mbox{ \pm 30\% } \end{array}$
- Max. Voltage: 250 VDC (lin) 125 VDC (no lin)
- Nominal Power 50°C (122°F) (see power rating curve)
 0.25 W (lin) 0.12 W (no lin)
- Taper (*) (Log. & Alog. only $Rn \ge 1K$) Lin ; Log; Alog.
- Residual resistance(*): $\leq 0.5 \%$ Rn (5 Ω min.)
- Equivalent Noise Resistance: \leq 3% Rn (3 Ω min.)
- Operating temperature**: -25°C + 70°C (-13°F + 158°F)
- * Others upon request

** Up to 85°C depending on application

GGI

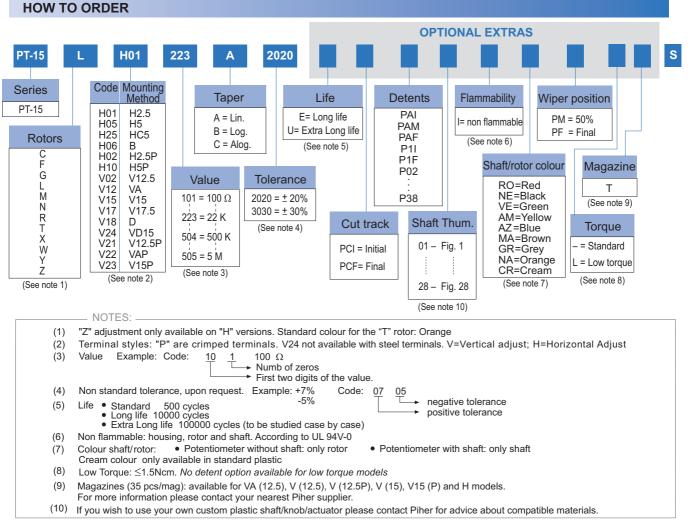

NOTE: The information contained here should be used for reference purposes only

www.piher.net

HOW TO ORDER CUSTOM DRAWING


PT-15 LH 01 + DRAWING NUMBER (Max. 16 digits)

This way of ordering should be used for options which are not included in the "How to order" standard and optional extras.


ROTORS

STANDARD OPTIONS

Cut track	No
Detents	None
Non flammable	No
Rotor colour	White
Shaft colour	Natural
Wiper position	Initial
Torque	Standard

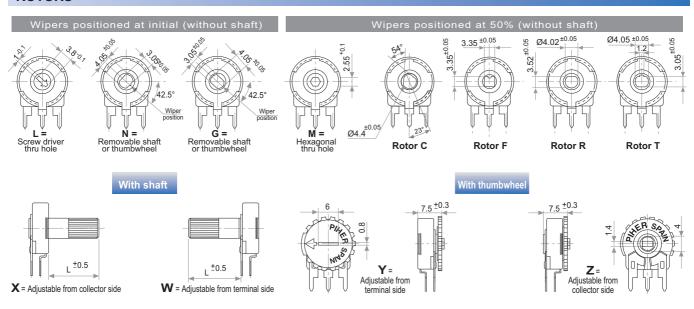

VERTICAL MOUNT - HORIZONTAL ADJUST

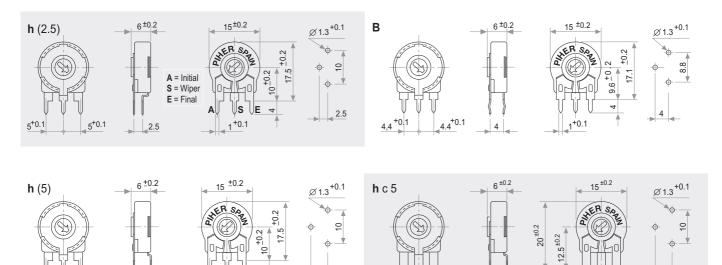

5^{+0.1}

5+0.1


5

5

HORIZONTAL MOUNT - VERTICAL ADJUST

5

1+0.1

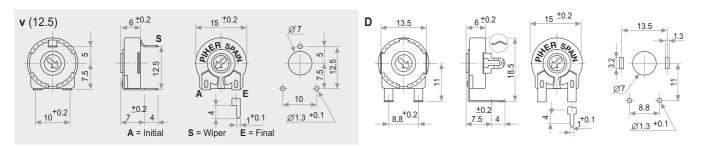

5+0.1


5+0.1

5

4

+0.1


HORIZONTAL MOUNT - VERTICAL ADJUST

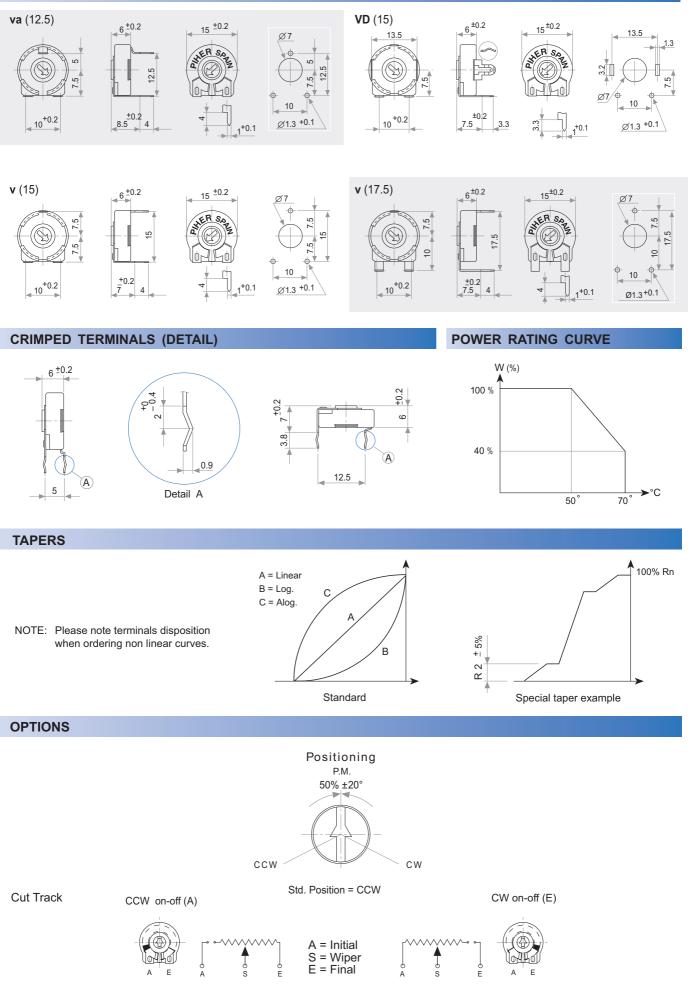


TESTS	TYPICAL VARIATIONS			
ELECTRICAL LIFE	1.000 h. @ 50°C; 0.25 W	±5 %		
MECHANICAL LIFE (CYCLES)	500 @ 10 CPM15 CPM	±3 % (Rn < 1 MΩ)		
TEMPERATURE COEFFICIENT	–25°C; +70°C	±300 ppm (Rn <100 K)		
THERMAL CYCLING	16 h. @ 85°C; 2h. @ 25°C	±2.5 %		
DAMP HEAT	500 h. @ 40°C @ 95% HR	±5 %		
VIBRATION (for each plane X,Y,Z)	2 h. @ 10 Hz 55 Hz.	±2 %		

NOTE : Out of range values may not comply these results.

SHAFTS (for N, G and T rotor types, top view)



A = Length (FRS) B = Knurling length C = Hollow depth D = Shaft diameter FRS = From rotor surface



Solid model shafts


	ØD	-
1.4		B ▼ <
3.7+0.05		•
_	5	-

FIG.	Α	в	D	Ref.
6	15	9	6	5219
7	16.8	9	6	5220
8	25.3	9	6	5207
12	46	5	6	5227

Slot (1 x 1.4) perpendicular to wiper position. Fig. 12 slot is on line with wiper position.

RECOMMENDED CONNECTIONS

Recommended connection scheme for Piher's position sensors (voltage divider)





SHAFTS (for N, G and T rotor types, top view)


By default shafts, knobs & & thumweels are delivered unassembled.

Mounted shafts, knobs & thumbweels are delivered at random position. Positioning available upon request.

If you wish to use your own plastic shaft/knob/actuator please contact Piher for advice about compatible materials.







Ø4 11.3




Fig. 3 / Ref. 5372

Fig. 15 / Ref. 5217


37,8


Ø6


Fig. 17 / Ref. 5210












Ø4







Fig. 21 / Ref. 6031*


Fig. 22 / Ref. 6029

Fig. 23 / Ref. 6022

Fig. 29 / Ref.6162

Fig. 25 / Ref. 6059





Ø6

Fig. 27 / Ref. 5268*

Fig. 28 / Ref. 6055


* Not available in self extinguishable plastic

THUMBWHEEL

By default shafts, knobs & & thumweels are delivered unassembled.

Mounted shafts, knobs & thumbweels are delivered at random position. Positioning available upon request.

If you wish to use your own plastic shaft/knob/actuator please contact Piher for advice about compatible materials.



DETENT CONFIGURATIONS EXAMPLES

This innovative PT's with detents family has been specifically developed to allow the integration of otherwise large and expensive external mechanisms into the body of the potentiometer thus allowing a high range of configurations: special tapers, torque, tolerances, linearity, cut track, etc.

This detent design not only adds a "click" sensation of position, but also offers enormous savings in both cost and space for any given application.


Strong and weak detents can be mixed as per cutomer's request.

Detent number and positions can be made or fitted to the customer needs or preferences.

 Relative detent positions along the total mechanical travel.
 Unless otherwise specified the detents are evenly spaced (using the end points as reference)

*For more than 13 detents versions please contact your nearest PIHER distributor. Mechanical and/or electrical features may be affected by detents. Detents may not be available for all mounting methods. Please see our separate PTs with detents datasheet at www.piher.net

DETENT DETAILS

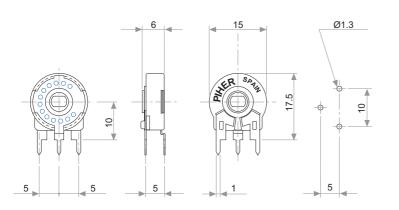

All Piher products can be adapted to meet customer's requirements

Disclaimer

The product information in this catalogue is for reference purposes. Please consult for the most up to date and accurate design information.

Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.

Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.


No licence, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorised Piher personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piter International Corp. Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

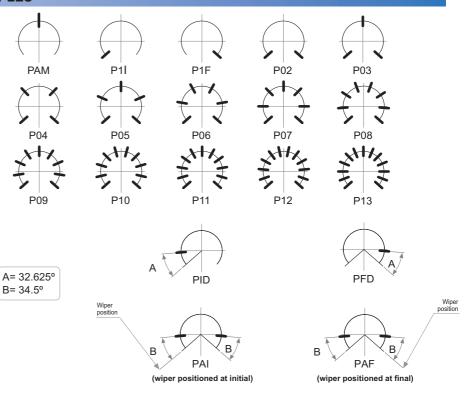

DETENTS & STEPPED OUTPUTS

Our potentiometers can feature flatted regions in its output curve. This allows engineers to precisely control constant voltage outputs within the normal rotational range of their potentiometer. These regions can be combined with Piher's detent feature providing a positive mechanical action when rotating the potentiometer into these constant voltage zones.

